



TANKS

Ozplast vertical water tanks are manufactured locally in the UAE and made from high quality UV stabilized PE material ensuring strength and service life. Tanks are available in three, four and five layer types and can be manufactured in a variety of colors to suit you specific requirements.



Leak Proof
 UV Stabilized
 Rust Proof
 Strong and Stress Resistant
 Rotation Moulded

Specification	OZ-VT 500	OZ-VT 1000
Capacity	500 US Gallons (1925 Ltrs)	1000 US Gallons (4000 Ltr)
Diameter	1400mm	1665mm
Height	1500mm	2090mm
Manhole Size	370mm	510mm
Thickness	6mm	8mm

SAFETY ROAD BARRIERS

Ozplast Road Barriers are ideal for eliminating the risks present in a number of situations. Manufactured locally in the UAE, they are made from high quality UV stabilised polyethylene and are designed to ensure strength, ease of use and quality.



Lightweight, easy to transport
 Maintenance free
 High visibility colors
 Variable Weight

Specification	OZ-RB-2200
Length	2205mm
Height	824mm
Bottom Width	515mm
Top Width	175mm

Typical Application
Road Diversions
Pedestrian control
Construction/Building sites
Demarcation
Sport events

PLASTIC DEBRIS CHUTES

Ozplast plastic debris chutes are designed to assist in the disposal of waste from height. Manufactured in the UAE utilizing high quality polyethylene the chutes are both durable and light.



General Features

- Quick and Easy Installation
- Ribbed for improved strength
- Light and durable
- Cost effective and safe
- Reusable and UV Resistant
- Designed for easy transport and storage
- Yellow colour for high visibility
- Adjustable



PLASTIC
DEBRIS CHUTES




UAE Distributor


Union Global Technical Equipment LLC www.unionglobaltech.com
Email : sales@unionglobaltech.com Phone:+971-4-4426684



Hopper

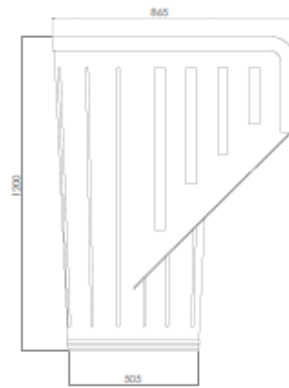

side view

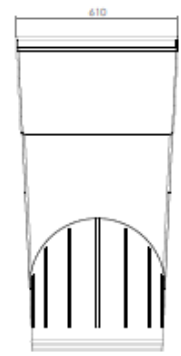

front view

Chute



front view

Specifications

	Hopper	Chute
Total Length (mm)	1200	1220
Working Length (mm)	1050	1070
Outer Diameter – Top (mm)	610	615
Outer Diameter – Bottom (mm)	505	505
Avg. Weight (kg)	15	12
Avg. Wall Thickness (mm)	5	5



**PLASTIC
DEBRIS CHUTES**




UAE Distributor

Union Global Technical Equipment LLC www.unionglobaltech.com
Email : sales@unionglobaltech.com Phone:+971-4-4426684



Typical Layout

Each floor will require 1 hopper, 1 pair of brackets and 3 Chutes (dependent on final floor height required). This will result in a total maximum working length of $1050+1070+1070+1070 = 4260\text{mm}$.

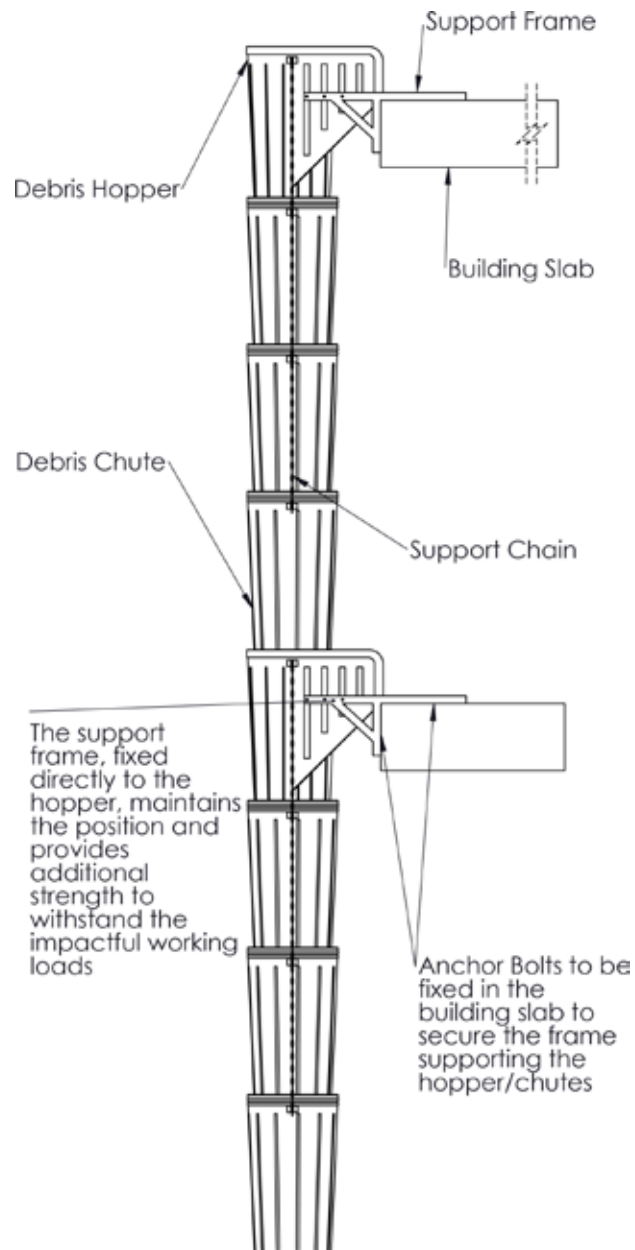

The final heights can be amended simply by adjusting the chain and hooks supplied with the components and increasing or decreasing the overlap of the chutes.

The mounting frames can be supplied either galvanized or primer coated and include M10 anchor bolts for mounting to the concrete slab.

